




TECHNICAL SHEET FA 20 400 15

WIRE ROPE RETRACTABLE FALL ARRESTER, LENGTH 15 M

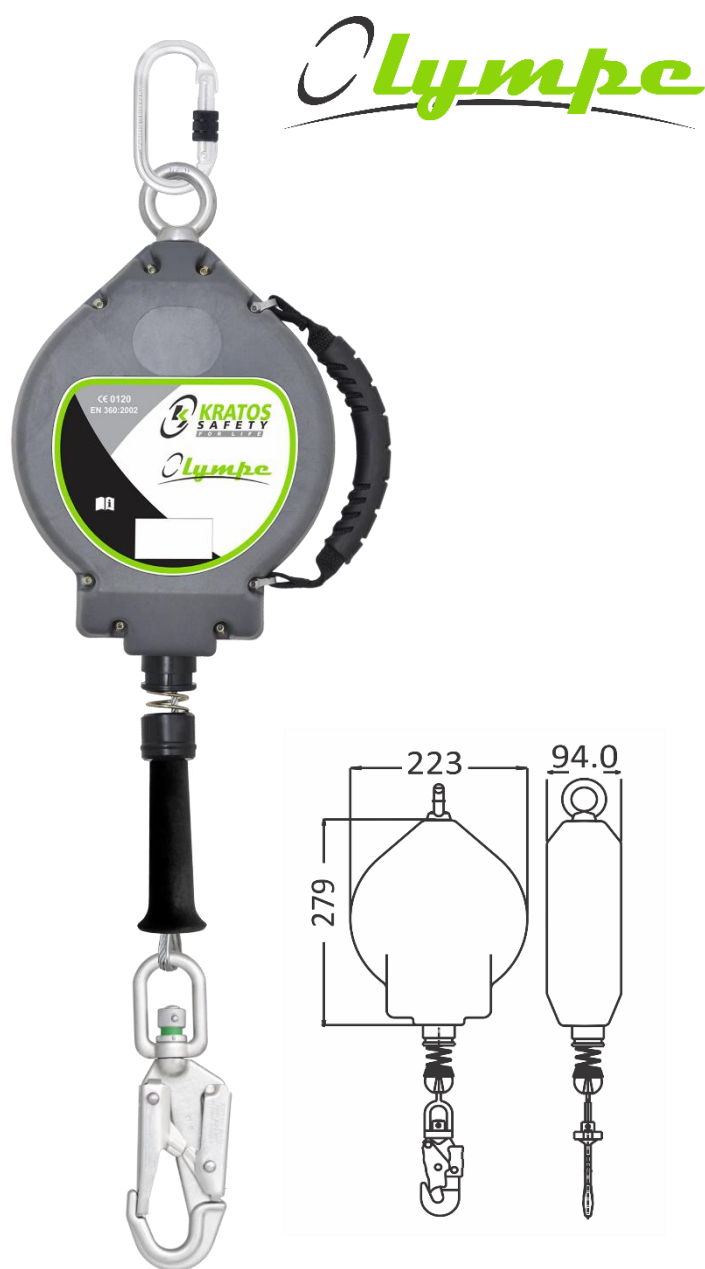

- Comes with Galvanized Steel Wire Rope of diam. 4.5 mm.
- Casing made up of high impact strength Polymer, to prevent breakage.
- Handle with special grip for a perfect comfort during carrying.
- Swivel at the top and at the bottom of the device.
- Internal braking mechanism to reduce the fall arrest force to less than 6kN.

Minimum breaking strength > 12 kN.

Connectors: Swivel and FA 50 101 17 at anchorage end, FA 50 203 20 with load indicator at attachment end.

Average locking speed: 1.6 m/s

Maxi weight for vertical use: 140 kg.

Compliance: EN 360:2002.

Tested and approved for horizontal use with the extra lanyard FA 40 304 15.

Material of components:

Protective casing: PA 6 30% fiberglass

Wire rope: Galvanized steel

Connectors: Steel

| | | |
|----------------|-----------|----------------|
| Length: | CE | Weight: |
| 15 m | | 6.80 kg |

KRATOS SAFETY
689 Chemin du Buclay
38540 HEYRIEUX – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

| |
|--|
| HS CODE |
| 8428 90 90 |
| CARTON SIZE / PIECES |
| 60 x 40 x 24 cm / 2 |
| AET N°4023 I12 E1 |
| Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom |
| ARTICLE 11 GB07/73551 |
| SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom |