


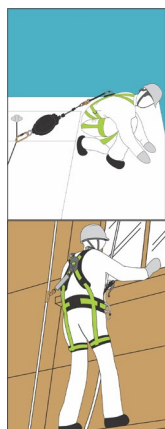


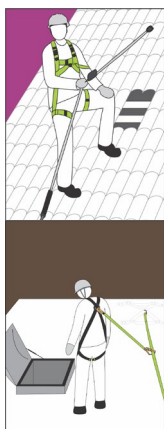

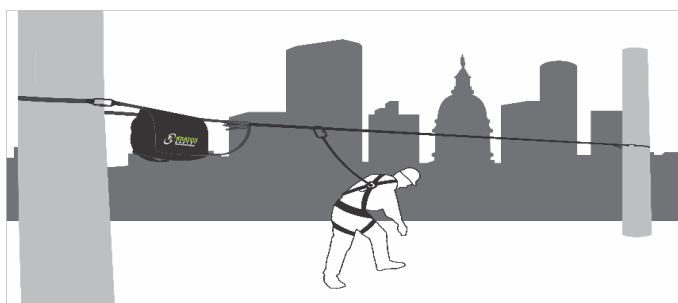




FA 60 007 00

P. 1 | 2



HS CODE
6307909899
CARTON SIZE / PCS.
60 x 40 x 24 cm / 5
AET (UE) N°2777/13781-01/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16008-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 60 007 00
CE	PPE regulation (EU) 2016/425 Annex II using EN 795:2012, TS 16415:2013
	x2
MAT.	 30 mm PES
R (kN) / MBS (kN)	19 kN / 23 kN
MAT. 	
LG. / f MIN. → MAX.	2.0 m → 20.0 m / 0.8 m → 3.2 m
	3.43 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Cantidad di utilizzatori
Anzahl der Benutzer



Matière connecteur / tendeur
Material of connector / tensioner
Material del conector / tensor
Materia del connetore / tenditore
Material Verbinder / Spanner

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

LG. / f MIN. MAX.

Longueur mini → maxi / Flèche mini → maxi
Min. → Max. length / Min. → Max. deflection
Longitud mínima → máxima / Flecha mínima → máxima
Lunghezza min. → max. / Flessione min. → max.
Länge min. → max. / Dirchhang min. → max.